

NOTES


1. ALL WORK SHALL CONFORM TO THE ADOPTED CODES AND ZONING REGULATIONS.
2. CONCRETE BLOCK MASONRY SHALL COMPLY WITH THE FOLLOWING:
 - A. CONCRETE MASONRY SHALL CONFORM TO ASTM C-90, GRADE-N.
 - B. MORTAR: TYPE M OR S.
 - C. GROUT: ALL CELLS W/2000 PSI PORTLAND CEMENT GROUT
3. THE ULTIMATE COMPRESSIVE STRENGTH REQUIRED FOR FOUNDATION CONCRETE SHALL BE 2500 PSI.
4. ALL REINFORCING STEEL SHALL BE INTERMEDIATE GRADE ASTM A615-40 AND OVERLAP SPLICES SHALL BE 40 BAR DIAMETERS MINIMUM. ALL REBAR HOOKS SHALL BE A MINIMUM OF 12 TIMES THE REBAR DIAMETER (12bd) IN LENGTH.
5. PROVIDE RETAINING WALL DRAINAGE SYSTEM AS FOLLOWS:
 - A. PROVIDE 1 CF/FT OF CLEAN COARSE GRAVEL WITH 4" DIAMETER PERFORATED PVC DRAINAGE PIPE WITH 1% GRADIENT TO DRAIN - OR OMIT HEAD JOINTS IN FIRST COURSE.
6. OPTIONAL: INSTALLATION OF A MOISTURE BARRIER ON THE FILL SIDE OF THE WALL WILL HELP TO PREVENT MOISTURE FROM PENETRATING THE VISIBLE SIDE OF THE WALL, RESULTING IN DISCOLORATION.
7. THIS RETAINING WALL STANDARD IS **NOT** DESIGNED TO SUPPORT SURCHARGE LOADS FROM MOTOR VEHICLES OR OTHER STRUCTURES.

REQUIRED INSPECTIONS

1. FOOTING
 - A. EXCAVATION TRENCH CLEAN WITH STEEL IN PLACE AND SUPPORTED 3" ABOVE AND AWAY FROM THE SURROUNDING EARTH/DIRT.
2. REBAR/PRE-GROUT AND DRAINAGE SYSTEM
 - A. BOND BEAM REBAR AND VERTICAL REBAR IN PLACE - INSPECTION PRIOR TO PLACING GROUT. DRAINAGE SYSTEM COMPLETE.
3. FINAL
 - A. AFTER GROUT IS PLACED AND BACKFILL COMPLETED - PRIOR TO ANY DECORATIVE CAP PLACEMENT.

SETBACK FROM TOP OF SLOPE

1. ALL FOOTINGS ADJACENT TO SLOPES TO BE AT LEAST 5' TO DAYLIGHT AS SHOWN BELOW.

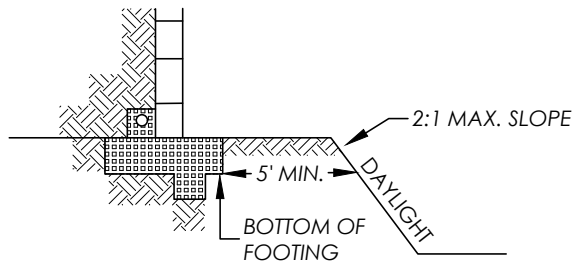

DESIGN PARAMETERS

ACTIVE SOIL PRESSURE (PSF)	
LEVEL BACKFILL	= 30
SLOPING (2:1 MAX)	= 43
PASSIVE SOIL BEARING (PSF)	= 150
COEFFICIENT OF FRICTION	= 0.25
ALLOWABLE SOIL BEARING PRESSURE (PSF)	= 1500
(NO INCREASE TAKEN FOR DEPTH OR WIDENING OF FOOTING)	

DISCLAIMER

ALTERNATE RETAINING WALL DESIGNS MAY BE POSSIBLE WHEN PROVIDED WITH AN ENGINEERED ANALYSIS. USE OF THIS STANDARD DESIGN IS AT THE USER'S RISK AND CARRIES NO IMPLIED OR INFERRED GUARANTEE AGAINST FAILURE OR DEFECTS.

CITY OF NAPA

PUBLIC WORKS DEPARTMENT

RETAINING WALLS - NOTES

DRAWN BY:	BRL	CHECKED BY:	JGF
DATE:	06/2018	APPROVED BY:	JRL
SCALE:	NONE	DRAWING NO.	S-30B
FIELD NOTES:			