


SIDE VIEW

FRONT VIEW

NOTES:

1. CONTROLLER CABINET LE MEUR MODEL SG-AJR OR APPROVED EQUIVALENT, COLOR GREEN, ON CONCRETE FOUNDATION WITH MIN. 24" APRON.
2. CONTROLLER SERVICE LOCATION SHALL BE ESTABLISHED BY THE CITY PRIOR TO CONSTRUCTION
3. LOW VOLTAGE CONDUIT SHALL BE 1 1/2" PVC SHD.40, BURIED AT 20" DEEP.
4. CONTROLLER AS SPECIFIED.
5. PAD SHALL BE 4" THICK ON 2" OF CLASS II A.B. CONCRETE SHALL BE CLASS "A" (6 SACKS PER CY)

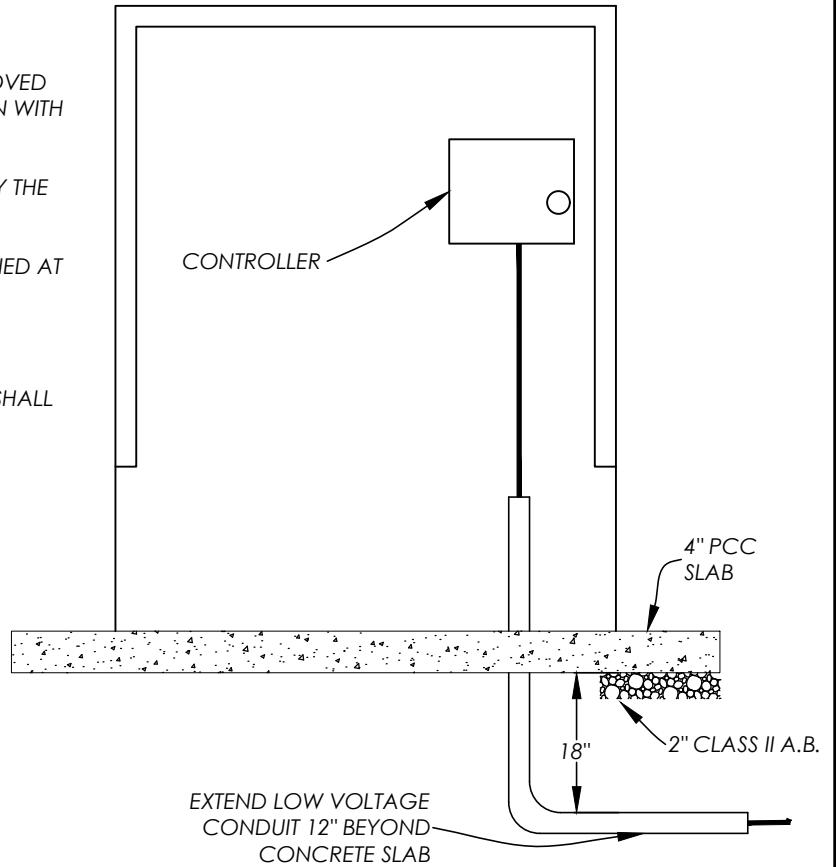

CITY OF NAPA

PUBLIC WORKS DEPARTMENT

BATTERY OPERATED IRRIGATION  
CONTROLLER CABINET

DRAWN BY:	BRL	CHECKED BY:	DMP
DATE:	06/2018	APPROVED BY:	JRL
SCALE:	NONE	DRAWING NO.	PL-3B
FIELD NOTES:			