




STANDARD CURB & 12" GUTTER

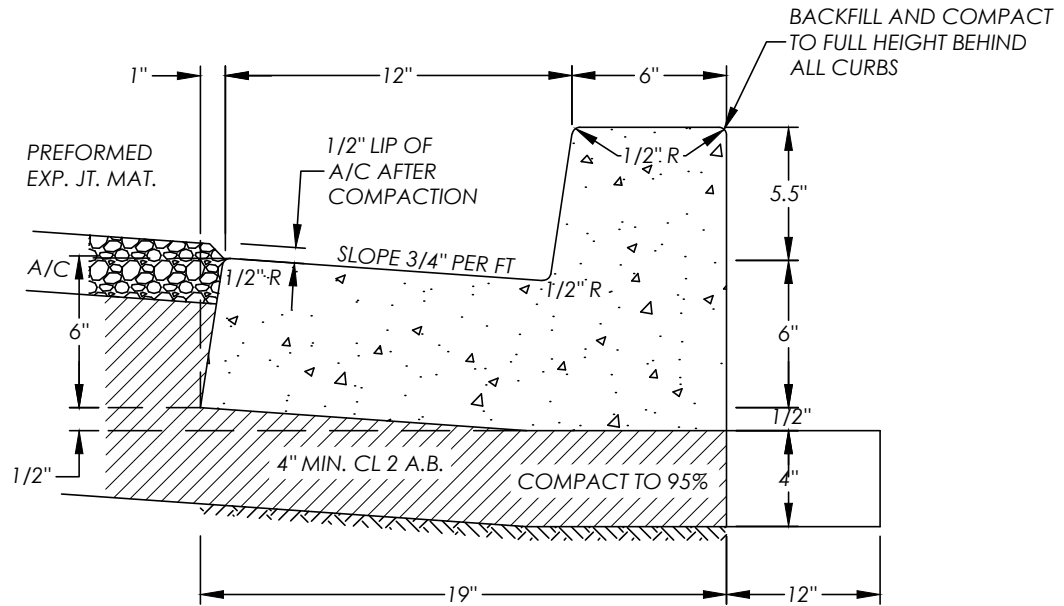

NOTE:
EDGER FINISH ALL EXPANSION &
WEAK PLANE JOINTS. SLIP
DOWELS INSTALLED AT ALL
EXPANSION JOINTS



TYP. EXPANSION JOINT



TYP. WEAK PLANE JOINT

NOTES

1. THIS STD. TO BE USED WHERE EXISTING GUTTER IS 12". ALL NEW CURB AND GUTTER SHALL BE PER CITY STD. S-1.
2. ALL CURBS ON PRIVATE STREETS AND PARKING LOTS SHALL BE TO CITY STANDARDS.
3. ALL CONCRETE SHALL BE CLASS "A" (6 SACKS PER CUBIC YARD), 3/4" AGGREGATE.
4. CONCRETE SHALL BE BRUSH FINISHED PARALLEL TO FACE OF CURB.
5. ALL CURBS SHALL BE BACKFILLED BEFORE STREET IS ROCKED AND PAVED.
6. CLASS 2 AGGREGATE BASEROCK, SUBGRADE AND FILL MATERIAL IF ANY SHALL HAVE A MINIMUM OF 95% RELATIVE COMPACTION UNDER CURB AND GUTTER.
7. ON STRAIGHT RUN OF STD. CURB AND GUTTER, 1/2" EXPANSION JTS. SHALL BE INSTALLED ON 40' CC, & WEAK PLANE JTS. INSTALLED MIDWAY BETWEEN EXPANSION JTS.
8. FOR EXP. JT. AND W.P. AT CURB RETURNS SEE S-8 AND S-9, AT C.B SEE D-1, D-2, AND D-3.
9. SUBGRADE AND CLASS 2 AB SHALL EXTEND TO ONE FOOT BEHIND CURB AND GUTTER.
10. EXTENDED CURB AND GUTTER SHALL HAVE WEAK PLANE JOINTS AT 12' ON CENTER.

CITY OF NAPA

PUBLIC WORKS DEPARTMENT

STANDARD CURB & 12" GUTTER

DRAWN BY: BRL

CHECKED BY: JGF

DATE: 06/2018

APPROVED BY: JRL

SCALE: NONE

DRAWING NO.

FIELD NOTES:

S-1A