


**B-3 CURB**

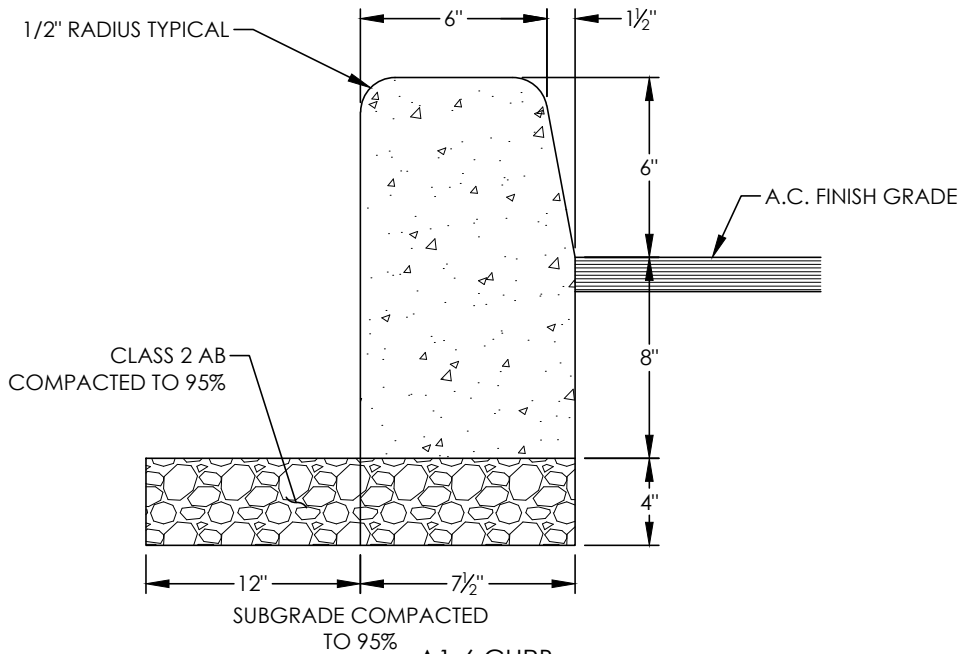

**A1-6 CURB**

**NOTES**

1. ALL CURBS INSTALLED ON PRIVATE PROPERTY SHALL BE TO CITY STDS.
2. ALL PORTLAND CEMENT CONCRETE (PCC) SHALL BE 4000 PSI (6 SACKS PER CUBIC YARD), 3/4" AGGREGATE.
3. PORTLAND CEMENT CONCRETE SHALL BE BRUSH FINISHED PARALLEL TO FACE OF CURB.
4. ALL CURBS SHALL BE BACKFILLED BEFORE STREET IS ROCKED AND PAVED.
5. CLASS 2 AB, SUBGRADE & FILL MATERIAL SHALL HAVE A MINIMUM OF 95% COMPACTION UNDER CURB.
6. ON STRAIGHT RUN OF CURB, 1/2" EXPANSION JOINTS SHALL BE INSTALLED ON 40' C.C. & WEAK PLANE JOINTS INSTALLED MIDWAY BETWEEN EXPANSION JOINTS.

CITY OF NAPA

PUBLIC WORKS DEPARTMENT

A1-6 & B-3 CURBS

DRAWN BY:	LFM
DATE:	06/2018
SCALE:	NONE
FIELD NOTES:	

CHECKED BY:	JGF
APPROVED BY:	JRL
DRAWING NO.	S-2