


B-3 CURB

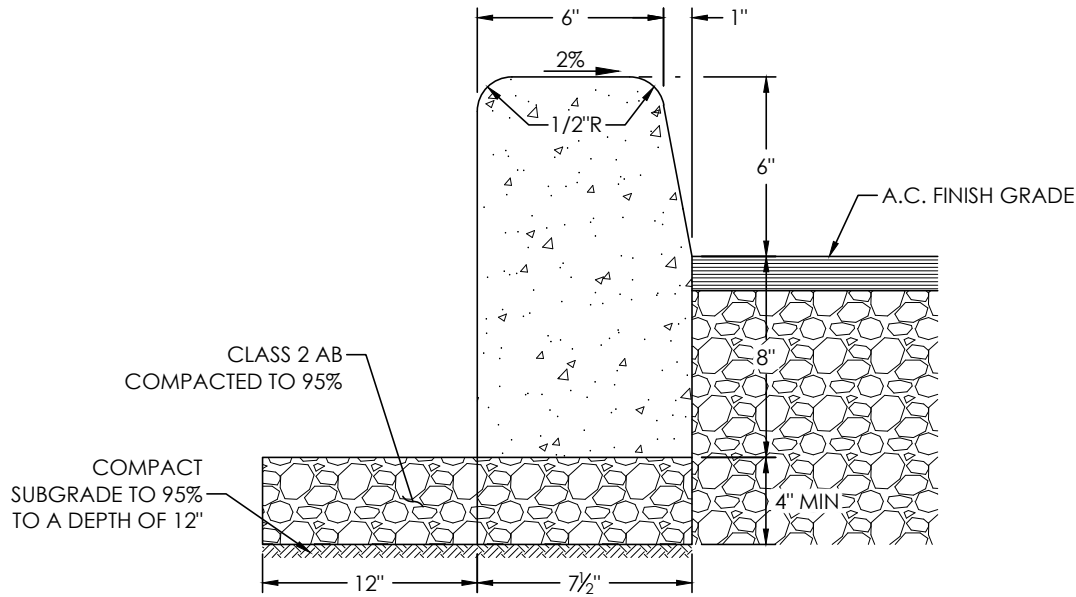

A1-6 CURB

NOTES

1. ALL CURBS INSTALLED ON PRIVATE PROPERTY SHALL BE TO CITY STDS.
2. ALL CONCRETE SHALL BE 4000 PSI (6 SACKS PER CUBIC YARD), 3/4" AGGREGATE.
3. CONCRETE SHALL BE BRUSH FINISHED PARALLEL TO FACE OF CURB.
4. ALL CURBS SHALL BE BACKFILLED BEFORE STREET IS ROCKED AND PAVED.
5. CLASS 2 AGGREGATE BASE, SUBGRADE AND FILL MATERIAL SHALL HAVE A MINIMUM OF 95% COMPACTION UNDER CURB
6. ON STRAIGHT RUN OF CURB AND GUTTER, 1/2" EXPANSION JOINTS SHALL BE INSTALLED ON 40' ON CENTER, & WEAK PLANE JOINTS SHALL BE INSTALLED AT 10' ON CENTER.
7. FOR EXPANSION JOINTS & WEAK PLANE JOINTS AT CURB RETURNS SEE CITY STD. S-8 & S-9. FOR EXPANSION JOINTS & WEAK PLANE JOINTS AT CATCH BASINS SEE CITY STD. D-2, D-2A, AND D-4A. NOT APPLICABLE TO B-3 CURB.
8. SUBGRADE AND CLASS 2 AGGREGATE BASE SHALL EXTEND TO ONE FOOT BEHIND CURB AND GUTTER.
9. EXTRUDED CURB AND GUTTER SHALL HAVE WEAK PLANE JOINTS AT 12' ON CENTER.

CITY OF NAPA

PUBLIC WORKS DEPARTMENT

A1-6 & B-3 CURBS

DRAWN BY:	LFM	CHECKED BY:	IHH
APPROVAL DATE:	06/2018	APPROVED BY:	JBL
SCALE:	NONE	DRAWING NO.	S-2
REVISED DATE:	08/2021		