


ANGLED

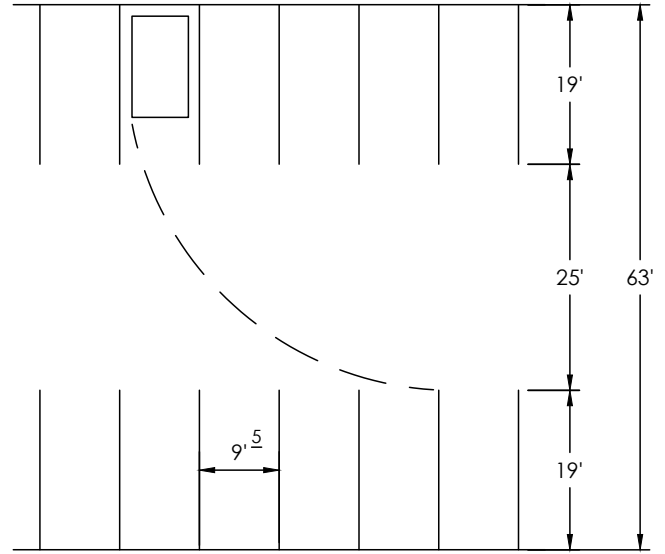

90°

ANGLED PARKING DIMENSIONS	α	75°	60°	45°	30°
STALL DEPTH TO WALL	A	19.5'	20'	18.5'	16'
AISLE WIDTH (ONE WAY)	B	21'	18'	14'	14'
WALL TO WALL MODULE	C	60'	58'	51'	46'
STALL WIDTH, PARALLEL TO AISLE	D	9.32'	10.39'	12.73'	18'

NOTES

1. COMPACT CAR SPACES

- a. STALL WIDTH MAY BE REDUCED BY ONE FOOT.
- b. STALL LENGTH MAY BE REDUCED BY THREE FEET.
- c. "COMPACT PARKING ONLY" SHALL BE STENCILED ON THE PAVEMENT AT THE ENTRANCE TO EACH STALL WITH 6" MINIMUM HEIGHT LETTERS.
- d. THE ALLOWABLE PERCENTAGE OF COMPACT CAR SPACES IS CONTAINED IN THE CITY'S ZONING ORDINANCE.
- e. WHEN PROVIDED, COMPACT CAR SPACE CLUSTERS SHALL BE DISPERSED THROUGHOUT THE PARKING LOT, NOT CONCENTRATED IN ONE AREA

2. PARALLEL SPACES

PARALLEL PARKING SPACES SHALL BE 6' X 22' WITH THE FOLLOWING EXCEPTIONS:

- a. PARALLEL SPACES ALONG A WALL, FENCE, OR HEDGE SHALL BE TEN FEET WIDE
- b. PARALLEL SPACES HAVING NO OBSTRUCTION OR ADJACENT PARKING SPACE WITHIN TEN FEET OF ONE END MAY REDUCE THE LENGTH TO 20 FEET. IF BOTH ENDS ARE SIMILARLY CLEAR, THE SPACE MAY BE REDUCED TO 18 FEET.

CITY OF NAPA

PUBLIC WORKS DEPARTMENT

STANDARD OFF STREET
PARKING REQUIREMENTS

DRAWN BY: LFM
APPROVAL DATE: 10/2021
SCALE: NONE
REVISED DATE:

CHECKED BY: EBM
APPROVED BY: JBL
DRAWING NO. S-21A